


DC24V 500GPH Bilge Pump



Product Features

1. Stainless steel shaft and tough, moisture-proof thermoplastic pump body.
2. Fully submersible and burn protected.
3. Long-life water-cooled motor.
4. Easy to install and remove the filtering device to ensure that the pump runs freely without vibration.
5. Short periods of operation without water will not burn out the pump.
6. The pump can withstand temperatures up to 110°F (43°C).
7. Suction stroke does not require complete submersion.

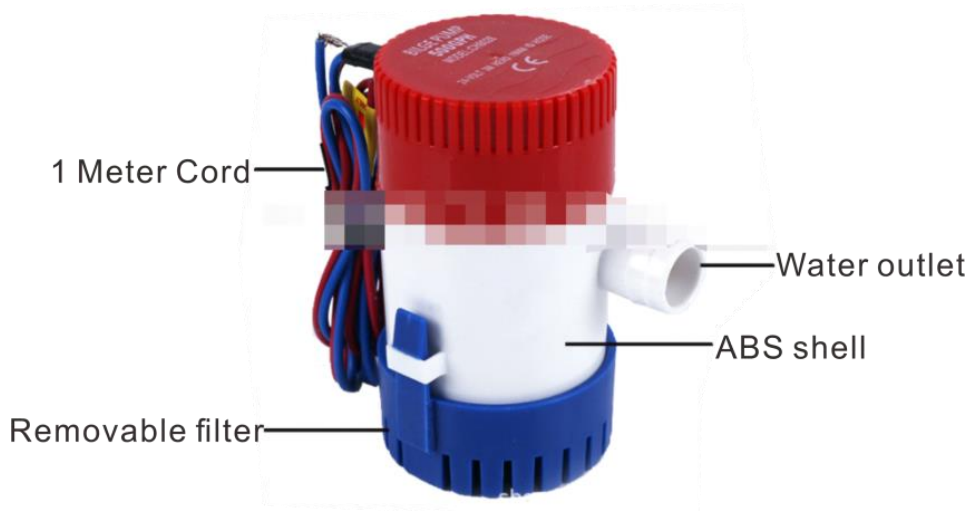

Main applications

Can be widely used in sewage sampling, large flow liquid transfer, low noise continuous work occasions; large, extra-large aquariums, small swimming pools, cisterns replenishment, fountains, and many other uses. Freshwater, seawater water quality analysis, sewage treatment, sewage sampling, water purification, ship bilge sewage discharge, aquaculture ornamental, water recycling transfer, agricultural spraying, irrigation, ground, carpet cleaning, etc.; Applicable industries: environmental protection, pharmaceuticals, marine, fisheries breeding, industry, agriculture, domestic and other vast industries.

Product Parameters

Working voltage: DC 24V

Working current: 1.2A

Lift: 3 meters

Line length: 1 meter

Outlet outer diameter: 19 mm

Idling speed: 9000 r/min

Power: 60W

Weight: 0.4KG