








# REENTION ELECTRICAL AND MECHANICAL CO.,LTD

## POLLY battery case assembly instruction

Name	POLLY	Model	DP-5/6/9(C)	Version	A
------	-------	-------	-------------	---------	---

### Tools of Assembly

Name	Where to use	Tools
Battery Case	Upper and lower case/ discharging port/lock	 Ph1# 5 * PH1 cross head screwdriver
	Charging port	  14mm Open end wrench or needle-nosed pliers
Battery Base	Fixing screw	 Ph1# 5 * PH1 cross head screwdriver
	Base nut	 5.5mm 5.5mm Hexagon socket

Review		Establishment		Date	
--------	--	---------------	--	------	--


**REENTION ELECTRICAL AND MECHANICAL CO.,LTD**  
**POLLY battery case assembly introduction**

Name	POLLY	Model	DP-5/6(C)	Version	A
------	-------	-------	-----------	---------	---

Upper and lower case assembly



1.Stick power display label to the upper battery case

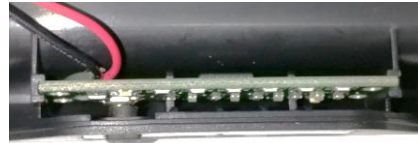


2.Install the power display button, as shown



4.Put the water-proof gasket on the charging port.




5.Install the charging port and switch




6.Fix the mechanical lock to the case by 2 M5\*10 flat head cross screw



7.Put the Right angel reeds into the house



8. Install the discharging port house to the base with 2 st2.2\*6 round head cross screw

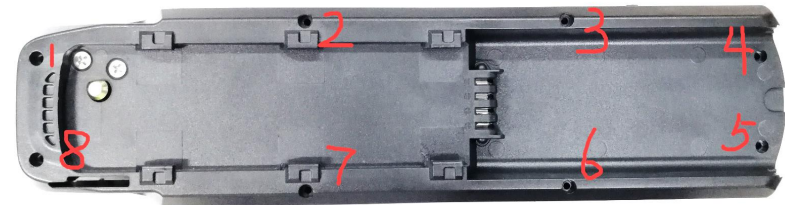

9. Fix the upper and lower case with 8 ST 2.9\*10 round head cross screws which are with flat end

Review		Establishment		Date	
--------	--	---------------	--	------	--

# REENTION ELECTRICAL AND MECHANICAL CO.,LTD

## POLLY battery case assembly introduction

Name	POLLY	Model	DP-5/6	Version	A
------	-------	-------	--------	---------	---


Battery base W/O controller case assembly



1. Assemble the reinforcing slide (iron) into the base slide (plastic)  
As marked in the picture.  
Fix by M3\*8 flat head cross screws + M3 nuts



2. Put the discharging port into the sliding rail cover, the outlet is square 6x8MM



3. Fix the sliding rail cover with 3 M3\*20 round head cross screw.



4. Three M3 nuts are used accordingly to the bottom of the sliding rail cover.

Review		Establishment		Date	
--------	--	---------------	--	------	--





# REENTION ELECTRICAL AND MECHANICAL CO.,LTD

## POLLY battery case assembly introduction

Name	POLLY	Model	DP-5C/6C	Version	A
------	-------	-------	----------	---------	---

Battery base W/ controller case assembly

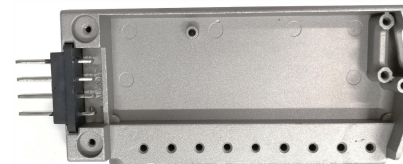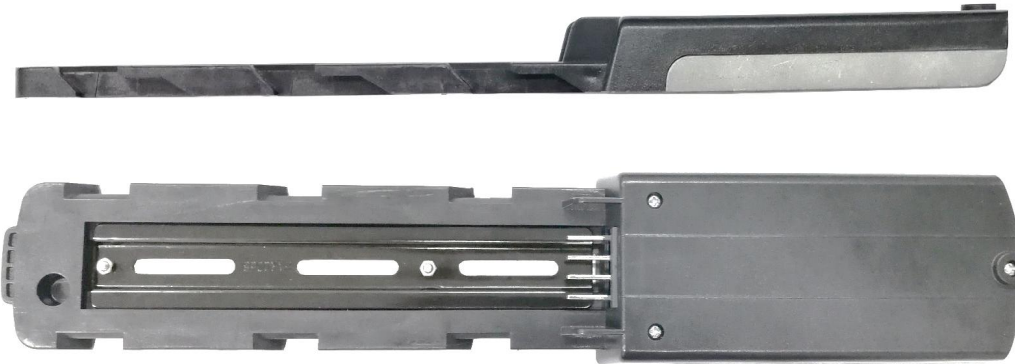

1.Assemble the reinforcing slide (iron)into the base slide(plastic)  
As marked in the picture.  
Fix by M3\*8 flat head cross screws+M3 nuts

2.Put the discharging port into the controller case

3.Fix the controller base with 3 M3\*10 round head cross screw.

Review		Establishment		Date	
--------	--	---------------	--	------	--