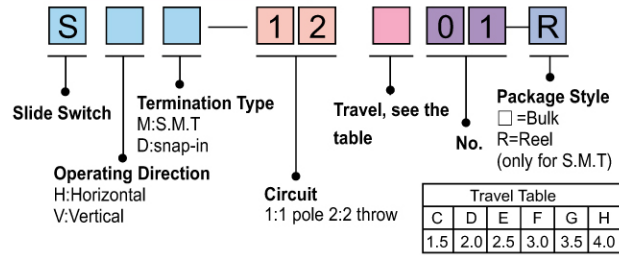




HOW TO ORDER



◆ Features

- Ultraminiature surface mount
- 1.5mm travel distance
- SP3T & on-momentary type
- Reflow solderable
- RoHS compliant

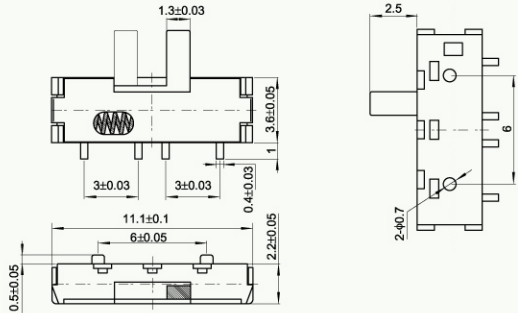

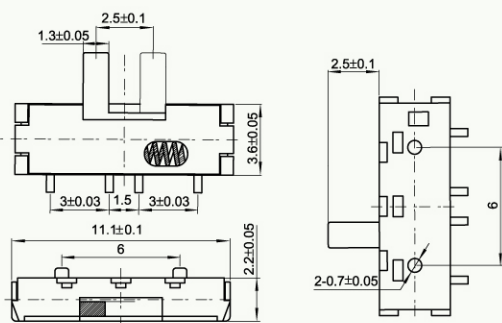

◆ Applications

- Telecommunication products
- Computer peripherals
- Thermostat select switch
- Instrumentations

◆ SPECIFICATION

Items		Standard
Operating temperature range		-10°C to +70°C
Electrical performance	Rating	300mA, 4V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	70mΩ max.
Durability	Lifetime	10,000 Cycles min
Mechanical performance	Operating force	2C-2P:180 ± 50gf
	Travel	2.5 ± 0.2mm

◆ DIAGRAM

No.	Dimensions	Circuit Diagram
		PCB Layout
1	● SHM-13C05 	
2	● SHM-13C06 	

SLIDE SERIES