


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN SPEED TECH PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM LINKO CORP.

ECN.NO	REV	MODIFICATION	DATE	DRAW	APPROVE
	A1	初版图纸	2021.01.18	梁建勇	

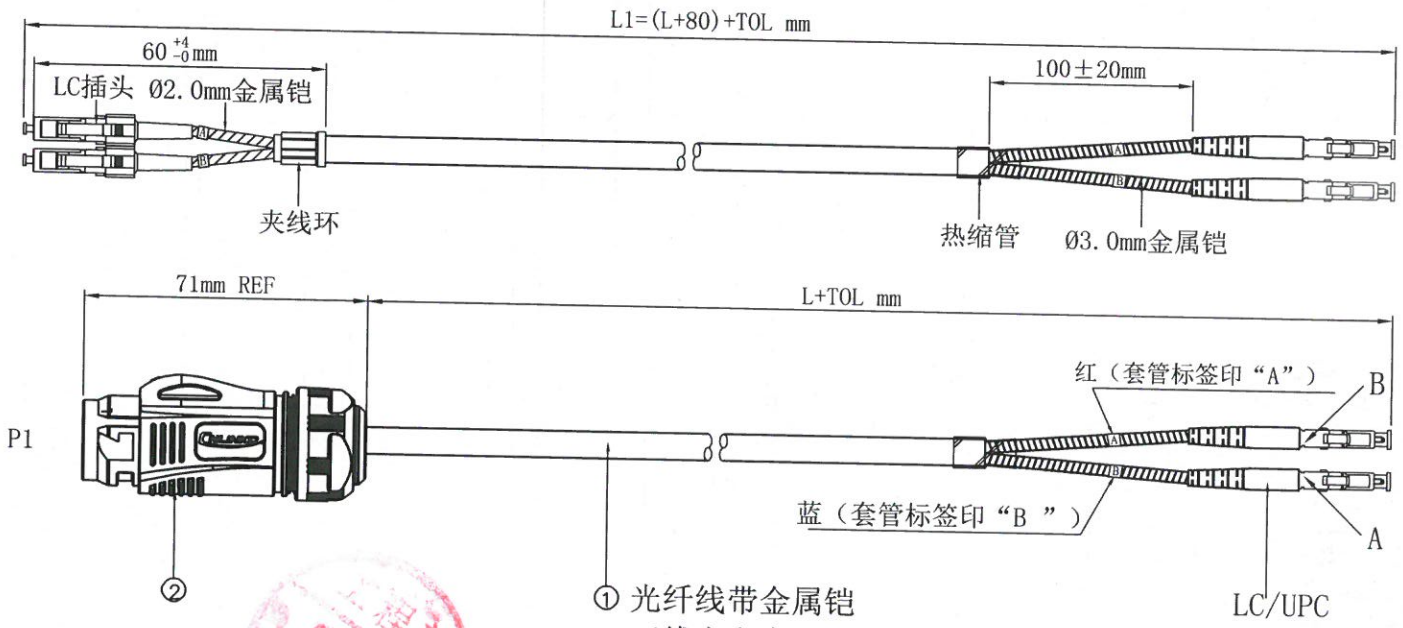

SPECIFICATION

1. INSERTION LOOSE: ≤0.3db;
2. RETURN LOOSE: ≥50db.
3. CONN : LC/UPC TO LC/UPC 连接头
4. CABLE: 2根 光纤线材 带金属铠, SM 9/125 G657A2 LSZH.
5. H. S TUBE: ID5.0*20mm 黑色, 黑线印白字“CNLINKO”。
6. LABEL: ECP型配线标签 印字: A ID3.0mm L=5MM
7. LABEL: ECP型配线标签 印字: B ID3.0mm L=5MM
6. 工作/存储温度: -20 ~ 70 °C
8. A对A级性, P1/P2端使用双联器件。
9. 所有部件均需符合RoHS2.0



成品料号	半成品料号	尺寸L=X (mm)
BD24-F0-LC-LC-0D5M-001	903-0009-00	500 ⁺⁸⁰ ₋₁₀ mm
BD24-F0-LC-LC-1M-001	903-0010-00	1000 ⁺¹⁰⁰ ₋₅₀ mm
BD24-F0-LC-LC-3M-001	903-0011-00	3000 ⁺²⁰⁰ ₋₅₀ mm
BD24-F0-LC-LC-5M-001	903-0012-00	5000 ⁺²⁰⁰ ₋₅₀ mm
BD24-F0-LC-LC-8M-001	903-0013-00	8000 ⁺³⁰⁰ ₋₅₀ mm
BD24-F0-LC-LC-10M-001	903-0014-00	10000 ⁺³⁰⁰ ₋₅₀ mm

PIN_OUT		
P1	颜色	P2
A	红色	LC接口
B	蓝色	LC接口

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	
X.X ±0.25	X' REF ± 5'
X.XX ±0.15	X." ± 3'
X.XXX±0.05	X'X' ± 1'
DRAWN	梁建勇 2021.01.18

CNLINKO
 深圳市凌科电气有限公司
 SHENZHEN LINKO ELECTRIC CO.,Ltd

DRAWN NAME:
 BD24型光纤单插头塑胶款 LC/UPC-LC/UPC两芯单模
 光纤线材 (带金属铠) L=0.5M/1M/3M/5M/8M/10M

PRODUCT NO. 见附表

FILE NAME:

②	BD-24-C/LC/016/PE-02-001	YM24型LC光纤单模双芯插头塑胶款	PCS	1	自制
①	半成品料号	LC/UPC-LC/UPC两芯单模光纤线材 (带金属铠) L=X+0.08M	PCS	1	外购
序号	料号	品名规格	单位	用量	备注

CHECKED	梁建勇	DATE	2021.01.18
APPROVED	梁建勇	DATE	2021.01.18
SCALE:	A3 SHOWN	UNIT:	mm
FORJ.	SIZE	REV.	A1
	A4	SHEET.	A/A