



另一侧字唛



3A 250V AC 
25T85 1E4 μ 

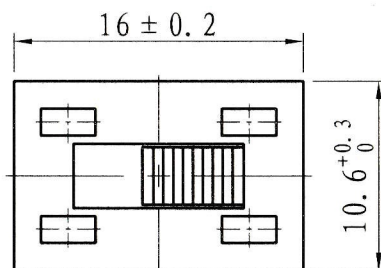

电气原理图:



3.8 TRAVEL

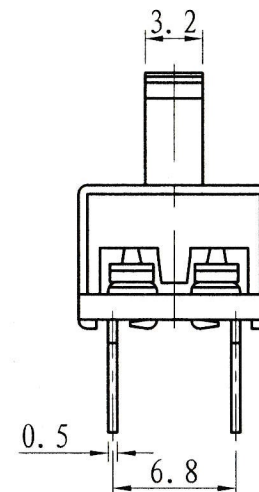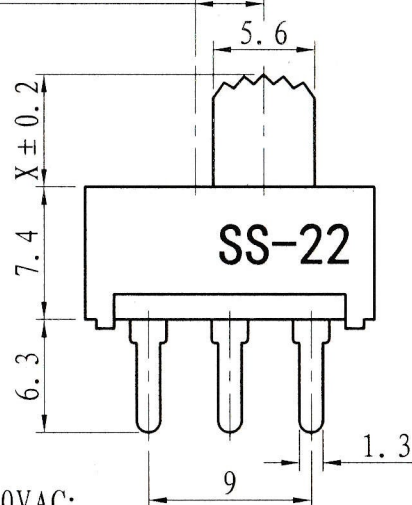

技术要求:

1. 额定电流Electric Rating: 3A 250VAC;
2. 电气寿命Electric life: 10000 Cycles;
3. 操作力度Operating force: 200 ~ 500gf;
4. 接触电阻Contact resistance: $\leq 100\text{m}\Omega$;
5. 介电强度Dielectric withstand:
端子-端子Terminal-Terminal 1500VAC 10mA/5s;
端子-手柄Terminal-Handle 3000VAC 10mA/5s;
6. 绝缘电阻Insulation resistance: $\geq 100\text{M}\Omega$;
7. 环境温度Environment temperature: 25T85;
8. 未注标注尺寸公差Tolerance unless otherwise specify: X. ± 0.30 .X ± 0.20 .XX ± 0.10 .

标记	处数	说明或更改文件号	签名	日期	单位	mm	产品类型	Product Type	拨动开关	
设计		版本		01	比例	2.5:1	产品类型			
审核		阶段标记		量产	图幅	A4	Product Model			SS-22G04
批准		日期	2021.5.11	页码	1/1		DWG No			11-SS-22G04