


Slide Switches



SPECIFICATIONS

CONTACT RATING: 6A @125 VAC or 28 VDC
3A @250 VAC

ELECTRICAL LIFE: 30,000 make-and-break cycles at full load

CONTACT RESISTANCE: 10 mΩ max. initial @2-4 VDC, 100 mA

INSULATION RESISTANCE: 1,000 MΩ min.

DIELECTRIC STRENGTH: 1,500 V RMS @ sea level.

OPERATING TEMPERATURE: -30°C to +85°C

MATERIALS

CASE - diallyl phthalate (DAP)




SLIDE HANDLE - Nylon

HOUSING - Stainless Steel

CONTACT AND TERMINAL - Copper alloy, silver plated

VERTICAL RIGHT ANGLE

SPDT

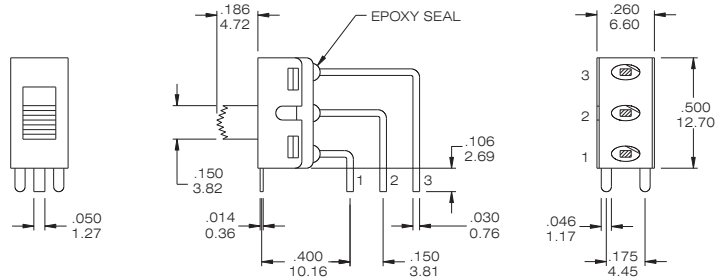

DPDT

