


*Schematic*

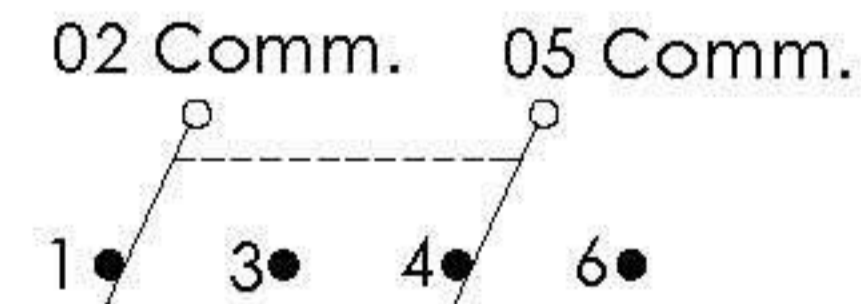

Model NO.	TYPE		
	MSDS-11	ON	NONE
Tem. Comm.	2-1 5-4	OPEN	2-3 5-6

**SPECIFICATIONS:**

CONTACT RATING : 6 AMPS @ 120 V AC or 28 V DC.  
 3AMPS @250 V AC or 0.4 AMPS @ 20V AC or DC  
 ELECTRICAL LIFE : 30,000 make-and-break cycles at full load.  
 CONTACT RESISTANCE : 10 mΩ max. initial @ 2-4 V DC.  
 100 mA, for both silver and gold plated contacts.  
 INSULATION RESISTANCE : 1,000 MΩ min.  
 DIELETRIC STRENGTH : 1,000 V RMS @ sea level.  
 OPERATING TEMPERATURE : -30 °C to 130 °C

**MATERIALS:**

CASE : Diallyl phthalate (DAP)(UL-94V-0).  
 ACTUATOR : Nylon.  
 BUSHING : Brass, nickel plated.  
 HOUSING : Stainless steel.  
 TERMINAL/CONTACT : Brass, with silver or gold plated.  
 or gold over silver  
 SWITCH SUPPORT : Brass, tin plated.